



GRÚA TODO TERRENO DEMAG AC80

COOPERATIVA DE TRANSPORTES E IZAJES • FICHA OFICIAL DE DESCARGA

REGISTRO FOTOGRÁFICO DE LA UNIDAD



DIMENSIONES Y MEDIDAS ESTRUCTURALES

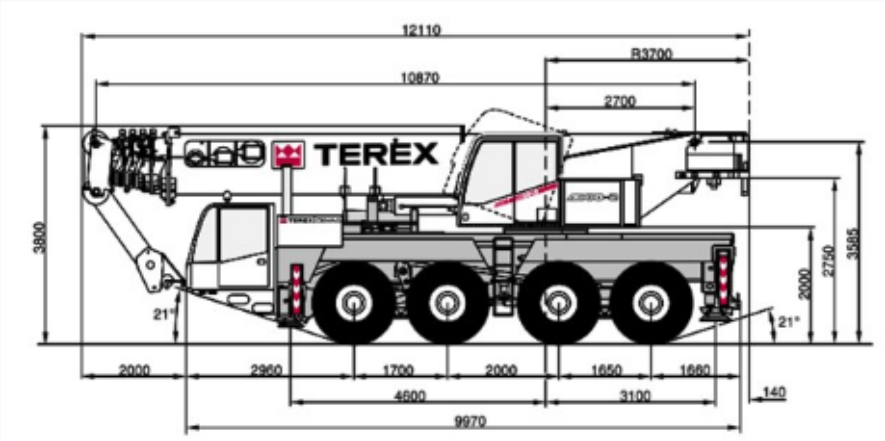


TABLA DE CARGA OFICIAL (PLUMA PRINCIPAL - ESTABILIZADORES EXTENDIDOS)

Radio (m)	Longitud de Pluma Principal (Metros)								
	10.9 m	16.1 m	21.4 m	25.0 m	31.3 m	37.1 m	42.3 m	46.1 m	50.0 m
3.0	80.0*	-	-	-	-	-	-	-	-
3.5	64.4	55.0	-	-	-	-	-	-	-
4.0	59.3	55.0	45.0	-	-	-	-	-	-
4.5	54.9	52.9	43.0	32.0	-	-	-	-	-
5.0	51.0	49.6	41.0	32.0	20.0	-	-	-	-
6.0	42.0	41.7	36.5	31.0	20.0	16.0	-	-	-
7.0	35.0	34.8	32.0	29.0	20.0	15.5	13.0	-	-
8.0	28.3	29.6	28.0	26.0	20.0	15.0	13.0	8.8	-
9.0	-	25.6	24.8	23.5	19.5	14.5	12.9	8.8	6.5
10.0	-	22.1	21.0	21.0	18.5	14.0	12.7	8.8	6.5

Radio (m)	Longitud de Pluma Principal (Metros)								
	10.9 m	16.1 m	21.4 m	25.0 m	31.3 m	37.1 m	42.3 m	46.1 m	50.0 m
12.0	-	16.1	15.8	16.8	16.1	12.7	11.8	8.8	6.5
14.0	-	-	13.8	13.3	12.8	11.3	10.9	8.5	6.5
16.0	-	-	11.2	10.7	10.2	10.0	10.0	8.0	6.5
18.0	-	-	9.2	8.7	8.2	8.5	8.8	7.5	6.2
20.0	-	-	-	7.2	7.0	7.4	7.3	7.0	5.9
22.0	-	-	-	-	6.4	6.3	6.4	6.3	5.5
24.0	-	-	-	-	5.8	5.8	5.4	5.3	5.1
26.0	-	-	-	-	5.2	5.2	4.5	4.7	4.4

* Capacidad máxima condicionada a equipamiento opcional. Los valores indicados representan las cargas netas máximas bajo normativa DIN/ISO. Es obligatorio planificar toda maniobra basándose en el radio real en obra y con la supervisión de la Cooperativa de Transportes e Izajes.