

GRÚA TODO TERRENO LINK-BELT 65RT

Capacidad Máxima: 65 Toneladas (60 t)

Pluma Telescópica: Pluma de alta resistencia con excelente radio de izaje

Tecnología: Gráficos de carga computarizados para máxima precisión en obra


Aplicación: Perfecta para infraestructura civil, telecomunicaciones y energía

REGISTRO FOTOGRÁFICO DE LA UNIDAD




PLANOS ESTRUCTURALES Y DIAGRAMAS DE INGENIERÍA

Diagrama de Dimensiones

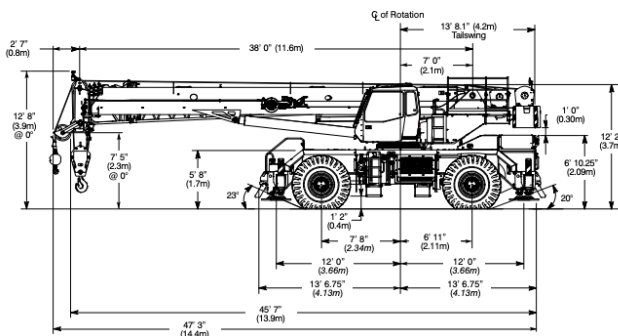

Curva de Altura e Izaje



Turning Radius - Front Wheel (4x2) Steering		English	Metric
Wall to wall over carrier		43' 2"	13.2m
Wall to wall over boom attachment		53' 3"	16.2m
Curbs to curbs		41' 6"	12.6m
Centerline of line		40' 0"	12.2m

Turning Radius - All Wheel (4x4) Steering		English	Metric
Wall to wall over carrier		38' 0"	11.6m
Wall to wall over boom attachment		54' 10"	16.8m
Curbs to curbs		41' 6"	12.6m
Centerline of line		40' 0"	12.2m

Tail Swing		English	Metric
With counterweight		13' 8.1"	4.2m
Without counterweight		N/A	N/A

Not To Scale

TABLA OFICIAL DE CAPACIDADES DE CARGA (LINK-BELT 65RT)

Fully Extended Outriggers – 360° Rotation (All Capacities Are Listed In Pounds)										
Radius (ft)	Boom Length (ft)									Radius (ft)
	38	45	55	63.6/65	75	85	95	105	115	
9	130,000									9
10	120,000	108,200	106,100							10
12	108,900	104,600	98,100	71,900**						12
15	91,600	91,200	86,200	71,900**	54,000					15
20	67,100	66,800	66,400	66,100**	54,000	55,900	46,400			20
25	52,000	52,600	53,000	53,000	53,700	49,900	41,800	36,200	28,100	25
30	41,800	42,500	43,000	43,400	43,600	43,800	37,800	34,200	28,100	30
35		33,300	33,900	34,200	34,400	34,600	34,000	30,700	28,100	35
40			26,400	26,700	26,900	27,100	27,200	27,300	25,700	40
45			21,200	21,600	21,800	22,000	22,100	22,100	22,200	45
50				17,700	18,000	18,100	18,200	18,300	18,300	50
55				14,800	15,000	15,100	15,200	15,300	15,400	55
60					12,700	12,800	12,900	13,000	13,000	60
65					10,800	11,000	11,100	11,200	11,200	65
70						9,400	9,500	9,600	9,700	70
75						8,100	8,200	8,300	8,300	75
80							7,100	7,100	7,200	80
85							6,100	6,200	6,200	85
90								5,300	5,400	90
95								4,600	4,600	95
100									4,000	100
105									3,400	105

**** 63.6 A—max Mode**

* Nota: Las capacidades reflejadas cumplen estrictamente con las normativas internacionales de estabilidad y seguridad para la unidad LINK-BELT 65RT bajo la supervisión del Departamento de Grúas.